



848T WHEEL LOADER

848T SPECIFICATIONS >>>

ENGINE

Emission Regulation	Tier 3 / Stage III
Manufacturer	Cummins
Model	B7
Rated Power	133 kW (178 hp / 181 ps) @ 2,200 rpm
Peak Torque	946 N·m @ 1,500 rpm
Displacement	6.7 L
Number of Cylinder	6
Aspiration	Turbocharged & Air-to-air intercooled

TRANSMISSION

Transmission Type	Countershaft, power shift
Torque Converter	Single stage, three elements
Maximum Travel Speed, fwd	39.3 km/h
Maximum Travel Speed, rev	26.6 km/h
Number of Speed, fwd	4
Number of Speed, rev	3

AXLES

Differential Front Type	Limited slip differential
Differential Rear Type	Limited slip differential
Axle Oscillation	±12°

STEERING

Steering Hydraulic System	Load sensing hydraulic steering
Steering Relief Pressure	22 MPa

BRAKES



Service Brake Type	Wet discs brake
Service Brake Actuation	Full hydraulic
Parking Brake Type	Drum
Parking Brake Actuation	Electro-hydraulic release

HYDRAULIC SYSTEM

Main Pump Type	Piston
Main Relief Pressure	28 MPa
Raise	5.2 s
Dump Time	1.0 s
Float Down Time	3.2 s
Hydraulic Cycle Time	9.4 s

LOADER ARM PERFORMANCE WITH STANDARD BUCKET 2.7 m³

Tipping Load - Straight (ISO 14397-1:2007)	11,550 kg
Tipping Load - Full Turn	

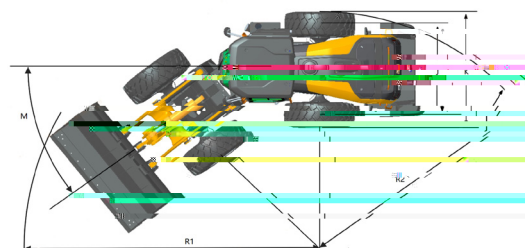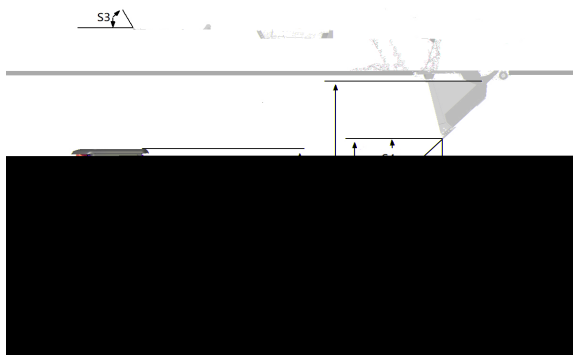

Liugong Machine Co., Ltd.

No. 1 Liutai Road, Liuzhou, Guangxi 545007, PR China

T: +86 772 3886124

E: overseas@liugong.com

www.liugong.com

Specifications and designs are subject to change without notice. Machines shown may include optional equipment. Liugong standard and optional equipment may vary from region to region. Please consult your Liugong dealer for information specific to your area. Engine power kW is converted to horsepower (1 kW=1.3596 ps and 1 kW=1.3410 hp) in this file.

03/2025 Designed by Liugong
Replace the previous versions of 10/2024